



**Verified Carbon
Standard**

QINGDAO LONGXIN WIND POWER PROJECT PHASE I

JUNO.

Document Prepared by Juno Carbon Investment & Environmental Technology
(Beijing) Co., Ltd.

Project Title	Qingdao Longxin Wind Power Project Phase I
Version	02
Report ID	-
Date of Issue	08-September-2022
Project ID	969
Monitoring Period	21-December-2017 to 07-November-2021
Prepared By	Juno Carbon Investment & Environmental Technology (Beijing) Co., Ltd.
Contact	Ding Xue 1701, Building 2, Yard A 2, Jiangtai Road, Chaoyang District, Beijing Tel: +86 18600953503 Email: dingxue@junocapital.cn Website: http://junocapital.com.cn/

CONTENTS

1PROJECT DETAILS	4
1.1 Summary Description of the Implementation Status of the Project	4
1.2 Sectoral Scope and Project Type	4
1.3 Project Proponent	5
1.4 Other Entities Involved in the Project	5
1.5 Project Start Date	5
1.6 Project Crediting Period	5
1.7 Project Location	6
1.8 Title and Reference of Methodology	7
1.9 Participation under other GHG Programs.....	7
1.10 Other Forms of Credit.....	7
1.11 Sustainable Development Contributions	8
2SAFEGUARDS.....	10
2.1 No Net Harm	10
2.2 Local Stakeholder Consultation	11
2.3 AFOLU-Specific Safeguards	12
3IMPLEMENTATION STATUS.....	12
3.1 Implementation Status of the Project Activity	12
3.2 Deviations	14
3.3 Grouped Projects	14
4DATA AND PARAMETERS	14
4.1 Data and Parameters Available at Validation	14
4.2 Data and Parameters Monitored.....	15
4.3 Monitoring Plan.....	21
5QUANTIFICATION OF GHG EMISSION REDUCTIONS AND REMOVALS	25
5.1 Baseline Emissions	25
5.2 Project Emissions	30

5.3	Leakage.....	30
5.4	Net GHG Emission Reductions and Removals	30
APPENDIX 1: <EVIDENCE OF ACHIVED SD CONTRIBUTIONS >.....		31

1 PROJECT DETAILS

1.1 Summary Description of the Implementation Status of the Project

Qingdao Longxin Wind Power Project Phase I (hereinafter referred to as the Project) developed by China Resources Wind Power (Qingdao) Co., Ltd., involves construction and operation of a wind power project that is sited on Liyuan Town and Dianzi Town, Pingdu City, Shandong Province, P.R. China. The Project installs 24 wind turbines with capacity of 2000kW each and 1 wind turbine with capacity of 1800kW, providing a total installed capacity of 49.8MW to generate clean renewable electricity.

The electricity generated by the Project is supplied to the North China Power Grid (NCPG), displacing electricity generated by NCPG which is dominated by fossil fuel fired power plants. The estimated annual net electricity generation and GHG emission reductions in the first crediting period (from 08/11/2011 to 07/11/2021) are 99,026MWh and 92,183tCO₂e respectively.

The scenario existing prior to the start of the implementation of the project is: The same electricity output by the project activity would have otherwise been generated by the operation of NCPG connected power plants and by the addition of new generation sources. That is the same as the baseline scenario.

The construction of the Project started on 26/05/2011 and The Project was put into operation on 08/11/2011.

The project has been registered as VCS project with Ref. VCS 969 and VCU of 82,302 tCO₂e have been issued for the monitoring period from 08/11/2011- 27/09/2012. The Project has been registered as a CDM project on 28/09/2012¹ (UNFCCC registration reference number: 6697). The emission reductions of the project have not been issued as CERs. The emission reductions during the monitoring period from 28/09/2012 to 20/12/2017 are under verification by another VVB and have been submitted for VCS issuance request.

During this monitoring period from 21/12/2017 to 07/11/2021, the total emission reduction achieved is 366,046 tCO₂e.

1.2 Sectoral Scope and Project Type

This category of the Project would fall within sectoral Scope 1: Energy Industry (Renewable/non-renewable sources).

The type of the Project is a grid-connected wind power generation project.

The project is not a grouped project.

¹ <http://cdm.unfccc.int/Projects/DB/TUEV-RHEIN1342414627.77/view>

1.3 Project Proponent

Organization name	China Resources Wind Power (Qingdao) Co., Ltd.
Contact person	Zhao Jie
Title	Project Manager
Address	4th floor, No. 24th floor, No. 217, Renmin Road, Liyuan office, Pingdu City, Shandong Province, P.R.China.
Telephone	+86 13954082518
Email	zhaojie192@crpower.com.cn

1.4 Other Entities Involved in the Project

Organization name	Juno Carbon Investment & Environmental Technology (Beijing) Co., Ltd.
Role in the Project	VCUs buyer
Contact person	Ding Xue
Title	Technical Director
Address	1701, Building 2, Yard A2, Jiangtai Road, Chaoyang District, Beijing
Telephone	+86 18600953503
Email	dingxue@junocapital.cn

1.5 Project Start Date

08/11/2011(commissioning start date)

1.6 Project Crediting Period

08/11/2011-07/11/2021 with a total number of 10 years.

In the registered VCS PD, the crediting period is described as from 08/11/2011 to 27/09/2012. A deviation is requested for the crediting period in the registered VCS PD. The project was registered under VCS Standard Version 3 and completed validation before 19/03/2020. Thus, it remains eligible to apply the crediting period requirements under VCS Version 3 which shall be a maximum of ten years and may be renewed at most twice, so the first renewable crediting period of the project should be updated from 08/11/2011 - 27/09/2012 to 08/11/2011-07/11/2021.

Moreover, the project is also a registered CDM project (Ref. 6697) with a 7*3 renewable project crediting period starting on 28/09/2012, the VCS issuance is not eligible for beyond the end of those 21 years, and the project's expected operation lifetime is 20 years in the registered CDM-PDD. Thus, given that the VCS crediting period started on 08/11/2011, the project proponent confirms the total VCS crediting period of the project activity will end on 07/11/2031.

This monitoring period is from 21/12/2017 to 07/11/2021 within the first VCS crediting period and the monitoring period covers 1,418 days.

1.7 Project Location

The project is located at Liyuan Town and Dianzi Town, Pingdu City, Shandong Province, P. R. China. The nearest Liyuan Town is about 10 kilometres from the project site. The geographical coordinates of the project is from 119.8827°E to 119.9503°E, and from 36.8157°N to 37.8915°N (The central GPS coordinate is 119.91125°E, 36.8568°N). Figure 1 and 2 show the geographical location of the project.



Figure 1. The project on the map of P. R. China



Figure 2. The project on the map of Pingdu City, Shandong Province, P. R. China

1.8 Title and Reference of Methodology

The approved consolidated baseline and monitoring methodology ACM0002: “Consolidated methodology for grid-connected electricity generation from renewable sources” (Version 12.2.0)

Tool for the Demonstration and Assessment of Additionality (Version 05.2.1)

Tool to calculate the emission factor for an electricity system (Version 02.2.0)

For detailed information please refer to:

<https://cdm.unfccc.int/methodologies/index.html>

1.9 Participation under other GHG Programs

The project has been registered as CDM project and the reference number is 6697, the first CDM crediting period is from 28/09/2012 to 27/09/2019 . The emission reductions of the project have not been issued as CERs under CDM.

1.10 Other Forms of Credit

● Emission Trading Programs and Other Binding Limits

The project has been registered as VCS project with Ref. VCS 969 and VCU of 82,302tCO₂e have been issued for the monitoring period from 08/11/2011-27/09/2012. All credits from 21/12/2017 to 07/11/2021 will be only claimed under VCS program as VCUs for the project to avoid double counting, which will not be used for compliance with emission trading programs or to meet binding limits on GHG emissions.

The project proponent China Resources Wind Power (Qingdao) Co., Ltd. is an enterprise for renewable energy investment, is not included in the compliance entity list by China national Emission Trading Scheme (ETS). Also, the project has not been registered as a CCER (Chinese Certified Emission Reductions) project in China, thus it is not eligible for emission reductions

transaction under the China ETS. Therefore, the project is not involved in an emission trading program or any other mechanism that includes GHG allowance trading. Furthermore, as a voluntary emission reduction project, the GHG emission reductions and removals generated by the project will not be enforced to be used for compliance in China.

Furthermore, as declared by the project proponent the credits in this monitoring period (21/12/2017- 07/11/2021) has not been counted and will not be counted under other kind of GHG programs.

- Other Forms of Environmental Credit

The project hasn't sought or received another form of environmental credits.

1.11 Sustainable Development Contributions

The project has contributed to sustainable development mainly by:

During this monitoring period, 393,219.283 MWh of electricity from renewable sources has been exported to NCPG, which contributes to SDGs Target 7 “Affordable and Clean Energy²” and China’s National Plan on Implementation of the 2030 Agenda for Sustainable Development³ 7 through increasing the share of clean energy consumption.

The project creates direct and indirect employment opportunities during construction and operation phases, so it contributes to SDGs Target 8 “Decent Work and Economic Growth” and China’s Implementation Action Plan of “increasing labor force participation rate through implementation of the classification policy. Vigorously enforce the Law on Promotion of Employment”. During this monitoring period, 26 people including 6 females were employed by the project owner to responsible for the operation, monitoring and equipment maintenance of this project, which provides employment opportunities and decreases unemployment rate.

The project produces clean renewable energy by diminishing CO₂ emissions. Therefore, it contributes to SDGs Target 13 “Climate Action” and China’s stated sustainable development priorities “Actively adapt to climate change and strengthen resistance capacity to climate risks in agriculture, forestry, water resources and other key fields, as well as cities, coastal regions and ecologically vulnerable areas”. The project has avoided 366,046 tCO_{2e} release into the atmosphere during this monitoring period.

Refer to table 1 for detail. The evidences of the project’s SD contributions have been provided in the Appendix of this report.

² <https://sdgs.un.org/goals/goal7>

³ <http://www.gov.cn/xinwen/2016-10/13/5118514/files/44cb945589874551a85d49841b568f18.pdf>

Table 1: Sustainable Development Contributions

Row number	SDG Target	SDG Indicator	Net Impact on SDG Indicator	Current Project Contributions	Contributions Over Project Lifetime
1)	7.2	7.2.1 Renewable energy share in the total final energy consumption	Implemented activities to increase	The project has supplied 393,219.283 MWh renewable energy to NCPG during this monitoring period.	The project has supplied 481,636.843 MWh renewable energy to NCPG during the first VCS monitoring period and this monitoring period.
2)	8.5	8.5.2 Unemployment rate, by sex, age and persons with disabilities	Implemented activities to decrease	During this monitoring period, 26 people including 6 females were employed for the operation, monitoring and equipment maintenance of this project, which helps decrease the unemployment rate.	The project activity had provided temporary working opportunities during the construction period. From the operation start date, 26 people were employed including 6 females by the end of this monitoring period, which provides employment opportunities and decreases unemployment rate.
3)	13.0	Tonnes of greenhouse gas emissions avoided or removed	Implemented activities to increase	The project has supplied 393,219.283 MWh clean energy to NCPG and avoided 366,046 tCO ₂ e release into the atmosphere during this monitoring period.	Prevented the release of 448,348 tCO ₂ e into the atmosphere during the first VCS monitoring operation and this monitoring period.

2 SAFEGUARDS

2.1 No Net Harm

The environmental impact assessment for this project was completed in September 2010 and approved by Qingdao Environmental Protection Bureau on 12th October, 2010. The approval number is Qinghuanshen [2010] 209. A summary of the report is illustrated as below:

Environmental impacts

Ambient air

The impact on ambient air quality of the project is mainly from dust during construction stage, by sprinkling water frequently and timely clearing can reduce the dust pollution. When the project is in operational period, there is no air pollutions. In conclusion, the project will not pose any threat on the quality of ambient air.

Impact from noise

There is some noise during the operation of wind turbines. The equipments and techniques with lower noise have been chosen to apply. Improvement on construction process and strengthening of equipment maintenance is emphasized. The Standard of noise limits of construction site (GB12523-90) is fulfilled during the construction period and Emission standard for industrial enterprise noise at boundary (GB12348-2008) Level II noise standard is fulfilled during operational period. Consequently, the noise of operation has little impact to the surrounding environment. Hence, the noise does not impact the work and daily life of local residents.

Electromagnetic impact

The operation of the wind farm generates electromagnetic pollution, whereas the pollution is slight. In addition, the wind turbines are very far from local residents and village. Therefore, the electronic magnetic pollution to the surrounding environment is insignificant.

Impact from Solid waste

Solid wastes generated from the project activity are excavated earth material and municipal solid waste. Part of the excavated earth material is backfilled, and the rest is used for land levelling and road construction near the project site. The municipal solid waste is collected and treated together with the waste from local residents. As the report indicates, solid waste is handled properly.

Impact from Wastewater

Wastewater is mainly domestic wastewater. Wastewater quantity is fairly small and treatment methods are applied for on-site primary treatment, and then the wastewater is treated together with the local wastewater. Oxidation pond has been built on the site, through which the discharging wastewater is fulfilled the Reuse of recycling water for urban and Water Quality standard for Urban Miscellaneous Water Consumption (GB/T 18920-2002) is used as virescence water. Therefore, the impact of wastewater is limited and mitigated.

Ecological impact

The land where the project located are wasteland and no immigration is involved in the project. Land compensation has carried out according to the relative national regulations. No migrating birds have been found in the project field. Therefore, the project is not located on the passage of migrating birds, and the project construction has not influence the migration of birds.

During the construction period, some vegetation was affected, but this will be restored after the construction is completed. The project is constructed in according with the soil and water conservation plan, which can effectively control soil erosion during the construction period and reduce the impact on the ecological environment.

Socio-economic impacts

As the project is a wind power plant, the project generates electricity from renewable sources which can reduce the consumption of fossil fuel and GHG emission. Furthermore, the project provides long-term opportunities for local residents and all the employees will be regularly trained with the wind farm operation technology, which contributes to local economic and social sustainable development.

In conclusion, construction and operation of the project does not cause any significant negative environmental nor socio-economic impacts.

2.2 Local Stakeholder Consultation

LSC prior to the project implementation

On 20th Mar 2011, the project owner carried out a survey of the local residents at Zhujiaying Village, Shuangmiao Village and Zhuangjiaying Village which belong to Liyuan Town and are around the project location. The staff introduced the background of the project and then sent out 50 copies of questionnaire in a random way, 49 pieces of reply were received. Among the interviewees, 22 of them are farmers, 4 are workers, 13 are governmental officials, 7 are students and 3 others.

The questions regarding the project were mainly as follows:

1. How is the current environment quality?
2. Are there any negative impacts of the proposed project on the everyday life of local residents?
3. Is the proposed project going to help improve the local economy?
4. Does the proposed project impact on local sound/noise environment?
5. Which is the environmental topic that concerns you the most during the construction and operation of the proposed project?
6. Do you support the proposed project?

The summary of questionnaire survey is listed as the following:

- 37 (76%) of them think the current environment quality is good, 10 (20%) think it is normal and 2 (4%) of them are unsure;
- 38 (79%) of them think there will not be any negative impacts on their everyday life, 11 (27%) of them are not sure;
- 36 (73%) of them think the project will help to improve the local economy, 13(27%) of them are not sure;
- 20 (41%) of them think the project doesn't impact on local sound/noise environment, 5 (10%) of them think it will, 27 (49%) of them are unsure;
- Regarding the construction and operation of the propose project, 27 (55%) of them are most concerned with electromagnetic interference, 19 (40%) of them are most concerned with the noise level and 3 (6%) of them are most concerned with wastewater;
- 45 (92%) of them support the implementation of the project and 4 (8%) of them don't care.

The summary of local stakeholders meeting: The local community possesses basically positive comments on the effects of the project. The interviewees considered that local social, economic and environmental development would be beneficial from the project. The response was overall supportive to the project implementation.

LSC during the operation period

In order to keep on-going communications with local stakeholders, the project owner has public its phone number of the central control room at the power plant gate to local people and village committees. Anyone who have comments on the project could phone the project owner directly. Meanwhile, the local authority has also conducted spot checks on the implementation of the project from time to time as per the request from the local governments' regulations.

There are no negative comments nor grievance received during this monitoring period. In line with VCS requirements all the processes have been implemented to receive comments from local stakeholders as well as communicate with them at periodic intervals.

2.3 AFOLU-Specific Safeguards

The project is not AFOLU project.

3 IMPLEMENTATION STATUS

3.1 Implementation Status of the Project Activity

This project installs 24 wind turbines with capacity of 2000 kW each and 1 wind turbines with capacity of 1800 kW which amount to a total installed capacity of 49.8MW. The estimated power output is 99,026MWh/year and the load factor is 22.70%. The Project started operation on 08/11/2011.

The main technical specifications of the wind turbine are provided in the following table.

Item	Unit	Index	Index
Model	-	V90-2.0MW	V90-1.8MW
Rated capacity	kW	2000	1800
Number of blades	-	3	3
Rotor diameter	M	90	90
Rated wind speed	m/s	13	12
Shutoff speed	m/s	2.5	3.5
Height of hub	m	80	80
Rated	V	690	690

A 110kV substation is built at the project site, which connects the project to the Tangtian 220kV Substation which is about 6.7 km away from the project and belongs to the North China Power Grid. Then the power produced in the wind farm can be transmitted to the North China Power Grid.

Bidirectional meter M1⁴ with accuracy 0.5S was installed on the Tangtian Substation to measure the total electricity supplied by the Project and Phase II project, meanwhile M1 is used to measure the total electricity imported from the grid by the Project and Phase II project. Meter M2 and M3 installed at the on-site substation recorded the electricity supplied by the Project and Phase II Project respectively.

Meter M4⁵ is used to measure the electricity imported from the grid by the project and Phase II project via a spare 10kV back-up line.

The previously used old bidirectional meter M1 (SN. 3730001000000188595727) at Tangtian substation was replaced by the new meter M1 (SN.3730001000000580579585) on 18/06/2021 according to the agreement of the project owner and the grid company. The new meter's type and accuracy are the same as the old one.

During this monitoring period, the Project had been in normal operation without special events such as overhaul or exchange of equipment. There were no events or situations which may impact the applicability of the methodology.

⁴ The originally used bidirectional meter M1 (SN.QD0243006231) with accuracy of 0.5S at Tangtian substation was replaced by the meter M1 (old) (SN.3730001000000188595727) with the type of DTZ666 and accuracy of 0.5S on 18/10/2016 (in the last monitoring period) with the consent of the grid company.

⁵ The originally used meter M4 (SN.DT4803509) with the accuracy of 1.0 installed on a spare 10kV line was replaced by the currently used meter M4 (SN. 370010042337325) with the type of DTZ522 and accuracy of 1.0 on 11/10/2015 (in the last monitoring period) with the consent of the grid company.

The monitoring system was implemented in line with the monitoring plan in the registered PD. The actual operation was conducted strictly in compliance with the description in the monitoring plan.

3.2 Deviations

3.2.1 Methodology Deviations

There is no methodology deviation applied during this monitoring period.

3.2.2 Project Description Deviations

In the registered VCS PD, the crediting period is described as from 08/11/2011 to 27/09/2012. A deviation is requested for the crediting period in the registered VCS PD. The project was registered under VCS Standard Version 3 and completed validation before 19/03/2020. Thus, it remains eligible to apply the crediting period requirements under VCS Version 3 which shall be a maximum of ten years and may be renewed at most twice, so the first renewable crediting period of the project should be updated from 08/11/2011 - 27/09/2012 to 08/11/2011-07/11/2021. Moreover, the project is also a registered CDM project (Ref. 6697) with a 7*3 renewable project crediting period starting on 28/09/2012, the VCS issuance is not eligible for beyond the end of those 21 years, and the project's expected operation lifetime is 20 years in the registered CDM-PDD. Thus, given that the VCS crediting period started on 08/11/2011, the project proponent confirms the total VCS crediting period of the project activity will end on 07/11/2031.

The deviation on the crediting period has no impacts on the applicability, additionality of the project nor appropriateness of baseline scenario of the project. There is no other project description deviation during this monitoring period.

3.3 Grouped Projects

The project is not a grouped project.

4 DATA AND PARAMETERS

4.1 Data and Parameters Available at Validation

Data / Parameter	EF _{grid,CM,y}
Data unit	tCO ₂ e/MWh
Description	Baseline emission factor of NCPG in year y.
Source of data	The registered PD.
Value applied	0.9309

Justification of choice of data or description of measurement methods and procedures applied	Ex-ante determined in the registered PD and fixed during the 1 st crediting period.
Purpose of Data	Calculation of baseline emissions.
Comments	-

4.2 Data and Parameters Monitored

Data / Parameter	EG _{output,y}		
Data unit	MWh		
Description	Total electricity supplied to the Grid by the Project and Phase II project		
Source of data	Measured by the electricity meter M1		
Description of measurement methods and procedures to be applied	Bidirectional meter M1 with the accuracy of 0.5S installed on the Tangtian Substation is owned by the grid company to measure the electricity supplied by the Project and Phase II project.		
Frequency of monitoring/recording	Continuously measured, daily recorded and monthly aggregated.		
Value monitored	824,529.728		
Monitoring equipment	M1 is a bidirectional meter.		
	The previously used old meter M1 at Tangtian substation was exchanged by the new meter M1 on 18/06/2021 according to the agreement of the project owner and the grid company. The information of the new and old meter is as follows:		
		M1 (old)	M1 (new)
	Type	DTZ666	DTZ666
	Accuracy class	0.5S	0.5S
	Serial number	3730001000000188595727	3730001000000580579585

	<table><tr><td>Calibration frequency</td><td>at least annually</td><td>at least annually</td></tr></table>	Calibration frequency	at least annually	at least annually
Calibration frequency	at least annually	at least annually		
	Detailed calibration information please refer to Table 2 “Main information of the electricity meters” below			
QA/QC procedures to be applied	The accuracy of meter M1 is 0.5S, which is consistent with the monitoring plan and the Technical administrative code of electric energy metering (DL/T448-2016). Meters were calibrated annually as per the requirement of Technical administrative code of electric energy metering (DL/T448-2016). Data will be archived for 2 years following the end of the last crediting period by means of electronic and paper backup. The reading records have been cross-checked with the sales receipts.			
Purpose of the data	Calculation of baseline emissions			
Calculation method	N/A			
Comments	/			

Data / Parameter	$EG_{another,y}$
Data unit	MWh
Description	Electricity generated by the Phase II project
Source of data	Measured by the electricity meter M3
Description of measurement methods and procedures to be applied	Bidirectional meter M3 with the accuracy of 0.5S installed on the 110kV outline of the main transformer of Phase II project on-site is used to measure the electricity generated by the Phase II project. The meter M3 measured the electricity continuously, the readings are daily recorded and monthly aggregated by the project owner.
Frequency of monitoring/recording	Continuously measured, daily recorded and monthly aggregated
Value monitored	428,794.080
Monitoring equipment	M3 is a bidirectional meter.

	Type: DTSD341 Accuracy class: 0.5S Serial number: 11060727990140 Calibration frequency: at least annually Detailed calibration information please refer to Table 2 “Main information of the electricity meters” below
QA/QC procedures to be applied	The accuracy of meter M3 is 0.5S, which is consistent with the monitoring plan and the Technical administrative code of electric energy metering (DL/T448-2016). Meter M3 is calibrated annually as per the requirement of Technical administrative code of electric energy metering (DL/T448-2016). Data will be archived for 2 years following the end of the last crediting period by means of electronic and paper backup.
Purpose of the data	Calculation of baseline emissions
Calculation method	N/A
Comments	/

Data / Parameter	EG _{import,y}
Data unit	MWh
Description	Total electricity imported from the Grid by the Project and Phase II project through the 110 KV line
Source of data	Measured by the electricity meter M1
Description of measurement methods and procedures to be applied	Bidirectional meter M1 with the accuracy of 0.5S installed on the Tangtian Substation is owned by the grid company to measure the electricity imported from the Grid by the Project and Phase II project.
Frequency of monitoring/recording	Continuously measured, daily recorded and monthly aggregated
Value monitored	2,486,880

Monitoring equipment		M1 (old)	M1 (new)
	Type	DTZ666	DTZ666
	Accuracy class	0.5S	0.5S
	Serial number	3730001000000188 595727	3730001000000580 579585
	Calibration frequency	at least annually	at least annually
	Detailed calibration information please refer to Table 2 “Main information of the electricity meters” below		
QA/QC procedures to be applied	The accuracy of meters is 0.5S, which is consistent with the monitoring plan and the Technical administrative code of electric energy metering (DL/T448-2016). Meters were calibrated as per the requirement of Technical administrative code of electric energy metering (DL/T448-2016). The reading records have been cross-checked with the sales receipts. Data will be archived for 2 years following the end of the last crediting period by means of electronic and paper backup.		
Purpose of the data	Calculation of baseline emissions		
Calculation method	N/A		
Comments	/		
Data / Parameter	EG _{im-spare,y}		
Data unit	MWh		
Description	Electricity imported from the Grid by the project and Phase II Project through a spare 10kV line		
Source of data	Measured by the electricity meter M4		
Description of measurement methods and procedures to be applied	Meter M4 with the accuracy of 1.0 installed on the spare 10kV line is used to measure the electricity imported from the grid by the Project and Phase II project.		

	The meter M4 measured the electricity continuously, and the readings are monthly recorded by the project owner and the grid company together on the Appointed date.
Frequency of monitoring/recording	Continuously measured, daily recorded and monthly aggregated
Value monitored	29.485
Monitoring equipment	M4 is a unidirectional meter. Type: DTZ522 Accuracy class: 1.0 Serial number: 370010042337325 Calibration frequency: at least annually Detailed calibration information please refer to Table 2 “Main information of the electricity meters” below
QA/QC procedures to be applied	The accuracy of meter M4 is 1.0, which is consistent with the monitoring plan and the Technical administrative code of electric energy metering (DL/T448-2016). Meters were calibrated as per the requirement of Technical administrative code of electric energy metering (DL/T448-2016). The reading records have been cross-checked with the sales receipts. Data will be archived for 2 years following the end of the last crediting period by means of electronic and paper backup.
Purpose of the data	Calculation of baseline emissions
Calculation method	N/A
Comments	/

Data / Parameter	$EG_{\text{facility},y}$
Data unit	MWh
Description	Net electricity supplied to the Grid by the project
Source of data	Readings from electricity meter M1, M3 and M4.
Description of measurement methods	Bidirectional meter M1 with the accuracy of 0.5S installed on the Tangtian Substation is used to measure the electricity supplied to

and procedures to be applied	the grid by the Project and Phase II project ($EG_{output,y}$) and electricity imported from the grid by the Project and Phase II project through the 110kV line ($EG_{import,y}$). Bidirectional meter M3 with the accuracy of 0.5S installed on the 110kV outline of the main transformer of Phase II project on-site is used to measure the electricity generated by the Phase II project. Meter M4 with the accuracy of 1.0 installed on a spare 10kV line is used to measure the electricity imported from the grid by the Project and Phase II project.
Frequency of monitoring/recording	Continuously measured, daily recorded and monthly aggregated
Value monitored	393,219.283
Monitoring equipment	Meter M1, M3 and M4 Detailed information of the meters please refer to Table 2 “Main information of the electricity meters” below
QA/QC procedures to be applied	The accuracy of M1, M3 and M4 is 0.5S, 0.5S and 1.0 respectively, which is consistent with the monitoring plan and the Technical administrative code of electric energy metering (DL/T448-2016). Meters were calibrated as per the requirement of Technical administrative code of electric energy metering (DL/T448-2016). Data will be archived for 2 years following the end of the last crediting period by means of electronic and paper backup.
Purpose of the data	Calculation of baseline emissions
Calculation method	The net electricity supplied to the Grid by the project is calculated by the following formula: $EG_{facility,y} = EG_{output,y} - EG_{another,y} - EG_{import,y} - EG_{im-spare,y}$
Comments	/

Table 2 Main information of the electricity meters

Meters	Type	Serial No.	Accuracy	Calibration date	Valid Date	Calibration frequency	Validity of Certifier
M1 ⁶	DTZ666 (The old meter)	37300010 00000188 595727	0.5S	03/04/2017 02/04/2018 01/04/2019 30/03/2020 29/03/2021	02/04/2018 01/04/2019 31/03/2020 29/03/2021 18/06/2021	Annually	State Grid Shandong Electric Power Metering Center
	DTZ666 (The new meter)	37300010 00000580 579585	0.5S	10/05/2021	09/05/2022		
M2	DTSD341	11060727 990139	0.5S	03/04/2017 02/04/2018	02/04/2018 01/04/2019		
M3	DTSD341	11060727 990140	0.5S	01/04/2019 30/03/2020	31/03/2020 29/03/2021		
M4	DTZ522	37001004 2337325	1.0	29/03/2021	28/03/2022		

4.3 Monitoring Plan

1. Monitoring equipment and data collection procedures

The electric energy metering system was equipped according to the requirements of the Technical administrative code of electric energy metering (DL/T448-2016).

The electricity supplied by the Project to the Grid is transmitted from the on-site substation of the Project through the 110kV transmission line and then be delivered to the Grid and share the 110kV transmission line with the Phase II Project, which is developed by the same project owner with the Project.

Bidirectional meter M1 with accuracy class of 0.5S installed at the Tangtian Substation is used to measure the total electricity supplied to the grid by the Project and Phase II project ($EG_{\text{output},y}$) and electricity imported from the grid by the project and Phase II project through the 110kV line ($EG_{\text{import},y}$). Grid company is responsible for the operation of M1, the meter M1 measured the electricity continuously, the readings are daily recorded by the project owner and the grid company. After confirmed by both sides, the sales receipts were issued by the grid company for cross-check.

Meter M2 with accuracy class of 0.5S installed at the 110kV outline of the main transformer of the project on-site is used to measure the electricity supplied to the grid by the Project. The reading of meter (M2) is carried out by the project owner for internal quality control of the project

⁶ The bidirectional meter M1 at Tangtian substation was exchanged on 18/06/2021.

which is not relating to the monitoring of any parameter to be monitored required by the monitoring plan.

Meter M3 with accuracy class of 0.5S installed at the 110kV outline of the main transformer of Phase II project on-site is used to measure the electricity generated by the Phase II Project ($EG_{another,y}$). The reading of meter M3 is recorded daily by the project owner and aggregated monthly.

A spare 10kV line is used for supplying electricity in order to start-up or emergencies. Electricity imported from the grid by the Project and Phase II project via this spare 10kV line ($EG_{im-spare,y}$) is measured by meter M4 with the accuracy of 1.0. The reading of meter M4 is recorded daily by the project owner and aggregated monthly and after confirmed by both sided, the sales receipts were issued for cross-check.

The monthly cut-off time for all meters mentioned above is as follows:

- From the start of this monitoring period to April 2020, the cut-off time is at 24:00 on the 20th day of each month
- From May 2020 and after, the cut-off time is at 24:00 on the last day of each month.

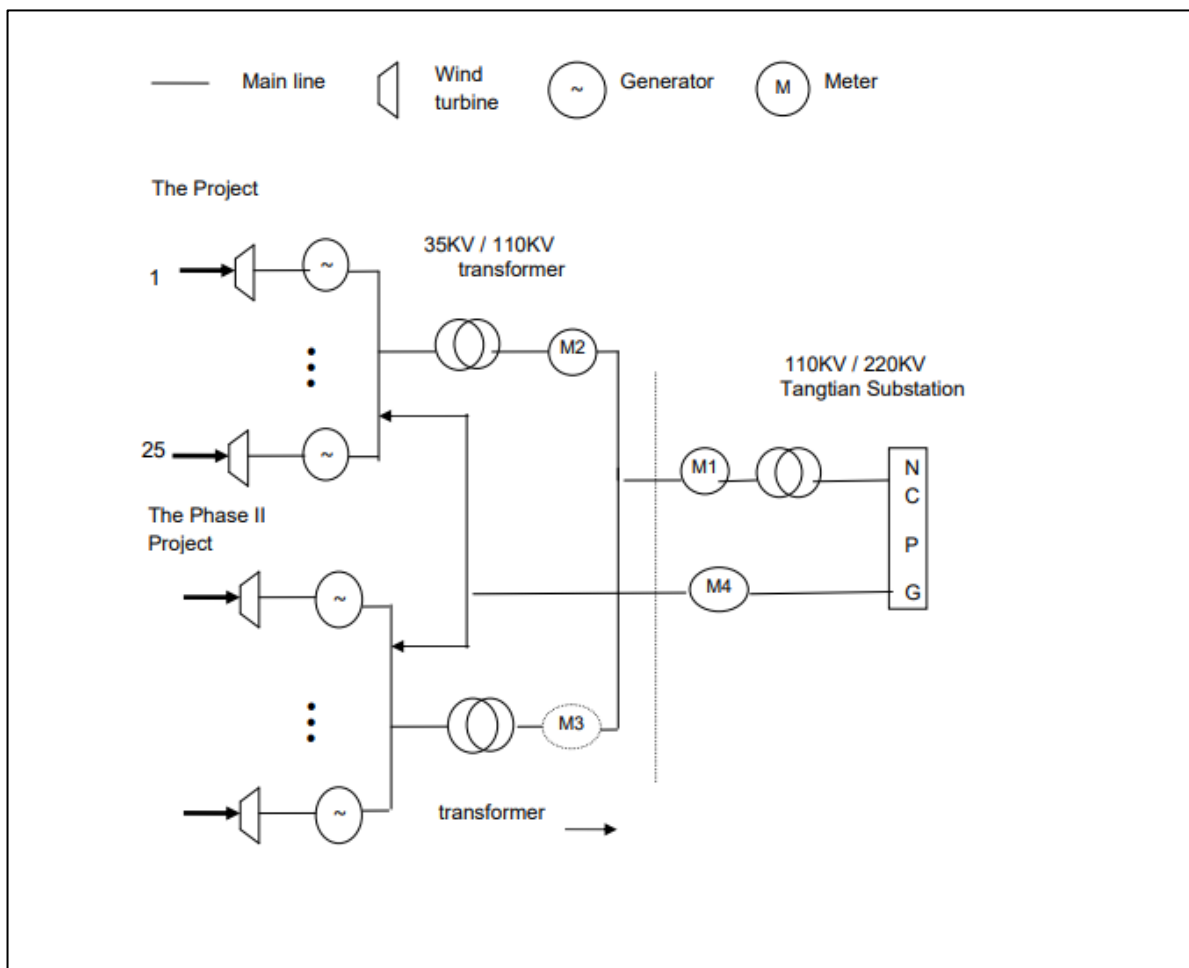


Figure 3. The flowchart of the Project

The net electricity supplied to the grid by the Project is calculated as followed:

$$EG_{\text{facility},y} = EG_{\text{output},y} - EG_{\text{another},y} - EG_{\text{import},y} - EG_{\text{im-spares},y}$$

The project owner keeps the records of all electricity meters' readings and sales receipts for verification by the VVB.

2. Organizational structure

China Resources Wind Power (Qingdao) Co., Ltd., the project owner has used this document as guideline in monitoring of the project emission reduction performance and will adhere to the guidelines set out in this monitoring plan. This plan should be modified according to actual conditions and requirements of VVB in order to ensure that the monitoring is credible, transparent, and conservative.

The responsibilities of the project staff are as follow:

The General Manager of the project entity will appoint a VCS project manager. The Operational and Monitoring Manager of the plant, the Financial Chief, and the Technical Chief are responsible for the collection of the data and information required in the monitoring plan.

General Manager: To be responsible for supervising the whole monitoring procedure.

VCS Project Manager: To be responsible for data management and compiling monitoring report.

Plant operational manager: To be responsible for collecting data and do internal audit.

Financial chief: To be responsible for collection of sales receipts.

Technical chief: To be responsible for preparing operational reports of the project activity, recording the daily operation of the wind farm, including operating periods, equipment defects, etc.

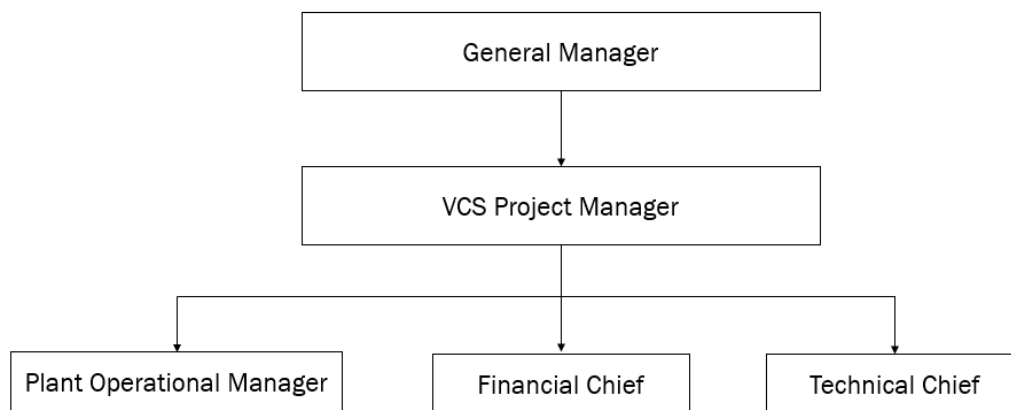


Figure 4. Management Structure of Monitoring Plan

3. Emergency procedures

In case metering equipment is damaged and no reliable readings can be recorded the project entity will estimate net supply by the project activity according to the following procedure:

In case metering equipment is damaged: The project entity and the grid company will jointly calculate a conservative estimate of power supplied to the grid. A statement will be prepared indicating

I: the background to the damage to metering equipment;

II: the assumptions used to estimate net supply to the grid for the days for which no record could be recorded;

III: the estimation of power supplied to the grid. The statement will be signed by both a representative of the project entity as well as a representative of the grid company.

4. Quality Assurance and Quality Control

The metering equipment will be properly calibrated and checked according to the rules of Relative Technical Administrative Code of Electric Energy Metering (DL/T448-2016). The project owner will prepare backup procedures to deal with any errors occurred to the meters. The calibration records carried out by the grid company should be provided to the project owner, and these records will be maintained by the project owner and the third party designated.

Meters should be tested by a qualified metric organization co-authorized by the project owner and the grid company within 10 days after the equipments malfunction caused by improper operation. All the calibration test records should be maintained safely for the verification.

5. Monitoring Training

Monitoring training is critical to ensure that all members of the Monitoring Team have a thorough understanding of the monitoring procedure and are able to carry out the monitoring tasks strictly in line with the monitoring plan. The team leader is responsible for evaluating training outcome. Only qualified staffs can work on duty.

The training includes:

I: Training on operation and monitoring system of the wind farm. This is the type of training which are routinely carried out by the wind farm itself for new staffs.

II: Training on VCS basics with focus on monitoring. It will be carried out by the VCS consultancy company before the project is implemented.

The VCS monitoring manual will be used as the primary training materials. The training includes the following contents:

- VCS project cycle and the significance of monitoring
- Management structure and work scope of each team member
- Components of the monitoring plan
- QA/QC procedure

- Monitoring report template
- Preparation for verification

6. Data management

The project owners keep the records of the data collected during monitoring, including but not limited to the meter readings of the meters, copies of sales receipts and the operation log etc. After the technical chief prepare the monitoring data every monthly, the plant operational manager cross checked the electricity with the power generated, and also the meter readings of M2 for internal data quality assurance. If there are any discrepancy happened, the monitoring will be rechecked to see if there is an error in the log or if the meter is faulty. Meanwhile, the financial chief checks the monitoring data with the sales receipts every month. At last, the monitoring data are verified by the Office Manager once every quarter.

5 QUANTIFICATION OF GHG EMISSION REDUCTIONS AND REMOVALS

5.1 Baseline Emissions

Baseline emissions in the monitoring period are calculated by multiplying the fixed baseline emission factor determined in the registered PDD of the project ex ante by net electricity supplied by the Project to the NCPG in the monitoring period.

$$BE_y = EG_{\text{facility}, y} \times EF_{\text{grid}, \text{CM}, y}$$

Where:

BE_y = Baseline emissions in year y (in tCO_{2e})

$EG_{\text{facility}, y}$ = Net electricity supplied to the Grid by the project in the year y (in MWh);

$EF_{\text{grid}, \text{CM}, y}$ = Baseline emission factor of NCPG (in tCO_{2e}/MWh).

$$EG_{\text{facility}, y} = EG_{\text{output}, y} - EG_{\text{another}, y} - EG_{\text{import}, y} - EG_{\text{im-spares}, y}$$

Where:

$EG_{\text{facility}, y}$ = Net electricity supplied to the Grid by the project in the year y (in MWh);

$EG_{\text{output}, y}$: Total electricity supplied to the Grid by the project and Phase II project in the year y (in MWh);

$EG_{\text{another}, y}$: Electricity generated by the Phase II Project in the year y (in MWh);

$EG_{\text{import}, y}$: Total electricity imported from the Grid by the project and Phase II project in the year y (in MWh);

$EG_{\text{im-spares}, y}$: Electricity imported from the Grid by the project and Phase II project through a spare 10 kV line in the year y (in MWh)

The $EG_{\text{facility } y}$ and BE_y are listed as follow:

Table 3 Calculation of baseline emissions

From	To	Net electricity supplied to the grid by the project (EG_{facility}) unit: MWh	Emission Factor ($EF_{\text{grid,CM,y}}$) unit: tCO ₂ e/MWh	Baseline Emission (BE_y) unit: tCO ₂ e
21/12/2017	31/12/2017	4,671.883	0.9309	4,349
01/01/2018	31/12/2018	105,772.188	0.9309	98,463
01/01/2019	31/12/2019	97,865.200	0.9309	91,102
01/01/2020	31/12/2020	91,793.456	0.9309	85,450
01/01/2021	07/11/2021	93,116.556	0.9309	86,682
Total		393,219.283		366,046

Detailed monitored monthly electricity data is shown in the table 4 below:

Table 4 Net electricity supplied to the Grid by the project

From	To	Total electricity supplied to the Grid by the Project and Phase II Project (EG _{output,y}) unit: MWh			Total electricity imported from the Grid by the project and Phase II project through the 110kV line (EG _{import,y}) unit: MWh			Electricity imported from the Grid by the project and Phase II project through a spare 10 kV line (EG _{im,spare y}) unit: MWh			Electricity generated by the Phase II Project (EG _{another,y}) unit: MWh	Net electricity supplied to the grid by the project (EG _{facility}) unit: MWh
		Data based on meter readings M1	Data based on sales receipt	Conservative value	Data based on meter readings M1	Data based on sales receipts	Conservative values	Data based on meter readings M4	Data based on sales receipts	Conservative values	Data based on meter readings M3	Calculated by EG _{output,y} - EG _{import,y} - EG _{im-spare,y} - EG _{another,y}
21/12/2017	31/12/2017*	7,835.520	7,835.520	7,835.520	13.068	13.068	13.068	0.169	0.169	0.169	3,150.400	4,671.883
Subtotal 2017				7,835.520			13.068			0.169	3,150.400	4,671.883
01/01/2018	20/01/2018*	11733.480	11733.480	11,733.480	22.572	22.572	22.572	0.292	0.292	0.292	6,223.360	5,487.256
21/01/2018	20/02/2018	19946.520	19946.520	19,946.520	54.120	54.120	54.120	0.461	0.461	0.461	10,283.680	9,608.259
21/02/2018	20/03/2018	25215.960	25215.960	25,215.960	46.200	46.200	46.200	0.461	0.461	0.461	13,840.640	11,328.659
21/03/2018	20/04/2018	26242.920	26242.920	26,242.920	19.800	19.800	19.800	0.461	0.461	0.461	13,553.760	12,668.899
21/04/2018	20/05/2018	23374.560	23374.560	23,374.560	23.760	23.760	23.760	0.461	0.461	0.461	11,740.960	11,609.379
21/05/2018	20/06/2018	17784.360	17784.360	17,784.360	43.560	43.560	43.560	0.461	0.461	0.461	10,234.400	7,505.939
21/06/2018	20/07/2018	19788.120	19788.120	19,788.120	39.600	39.600	39.600	2.877	2.877	2.877	10,816.960	8,928.683
21/07/2018	20/08/2018	18961.800	18961.800	18,961.800	80.520	80.520	80.520	0.461	0.461	0.461	9,928.160	8,952.659
21/08/2018	20/09/2018	11412.720	11412.720	11,412.720	62.040	62.040	62.040	0.461	0.461	0.461	5,241.280	6,108.939
21/09/2018	20/10/2018	12418.560	12418.560	12,418.560	96.360	96.360	96.360	0.461	0.461	0.461	5,292.320	7,029.419
21/10/2018	20/11/2018	13625.040	13625.040	13,625.040	93.720	93.720	93.720	0.461	0.461	0.461	12,615.680	915.179
21/11/2018	20/12/2018	13000.680	13000.680	13,000.680	50.160	50.160	50.160	0.461	0.461	0.461	4,565.440	8,384.619
21/12/2018	31/12/2018*	11433.840	11433.840	11,433.840	30.492	30.492	30.492	0.169	0.169	0.169	4,158.880	7,244.299
Subtotal 2018				224,938.560			662.904			7.948	118,495.520	105,772.188
01/01/2019	20/01/2019*	4994.880	4994.880	4994.880	52.668	52.668	52.668	0.292	0.292	0.292	823.680	4,118.240

21/01/2019	20/02/2019	18499.800	18499.800	18499.800	35.640	35.640	35.640	0.461	0.461	0.461	10917.280	7,546.419
21/02/2019	20/03/2019	15626.160	15626.160	15626.160	73.920	73.920	73.920	0.461	0.461	0.461	8004.480	7,547.299
21/03/2019	20/04/2019	26508.240	26508.240	26508.240	25.080	25.080	25.080	0.461	0.461	0.461	13712.160	12,770.539
21/04/2019	20/05/2019	19852.800	19852.800	19852.800	22.440	22.440	22.440	0.461	0.461	0.461	8544.800	11,285.099
21/05/2019	20/06/2019	24132.240	24132.240	24132.240	14.520	14.520	14.520	0.461	0.461	0.461	14569.280	9,547.979
21/06/2019	20/07/2019	13248.840	13248.840	13248.840	52.800	52.800	52.800	0.461	0.461	0.461	5536.960	7,658.619
21/07/2019	20/08/2019	12788.160	12788.160	12788.160	56.760	56.760	56.760	0.461	0.461	0.461	7145.600	5,585.339
21/08/2019	20/09/2019	7326.000	7326.000	7326.000	76.560	76.560	76.560	2.229	2.229	2.229	5456.000	1,791.211
21/09/2019	20/10/2019	11754.600	11754.600	11754.600	66.000	66.000	66.000	0.461	0.461	0.461	6908.000	4,780.139
21/10/2019	20/11/2019	19633.680	19633.680	19633.680	96.360	96.360	96.360	0.461	0.461	0.461	8101.280	11,435.579
21/11/2019	20/12/2019	18122.280	18122.280	18122.280	50.160	50.160	50.160	0.461	0.461	0.461	5660.160	12,411.499
21/12/2019	31/12/2019*	6485.160	6485.160	6485.160	18.392	18.392	18.392	0.169	0.169	0.169	5079.360	1,387.239
Subtotal 2019				198,972.840			641.300			7.300	100,459.040	97,865.200
01/01/2020	20/01/2020*	7656.000	7656.000	7656.000	31.768	31.768	31.768	0.292	0.292	0.292	6156.480	1,467.460
21/01/2020	20/02/2020	14226.960	14226.960	14226.960	64.680	64.680	64.680	0.461	0.461	0.461	7705.280	6,456.539
21/02/2020	20/03/2020	21951.600	21951.600	21951.600	47.520	47.520	47.520	0.461	0.461	0.461	10456.160	11,447.459
21/03/2020	20/04/2020	20577.480	20577.480	20577.480	43.560	43.560	43.560	0.461	0.461	0.461	11667.040	8,866.419
21/04/2020	31/05/2020	37480.080	37480.080	37480.080	52.800	52.800	52.800	0.461	0.461	0.461	19534.240	17,892.579
01/06/2020	30/06/2020	14898.840	14898.840	14898.840	68.640	68.640	68.640	0.461	0.461	0.461	7868.960	6,960.779
01/07/2020	31/07/2020	13419.120	13419.120	13419.120	51.480	51.480	51.480	0.461	0.461	0.461	6988.960	6,378.219
01/08/2020	31/08/2020	13596.000	13596.000	13596.000	73.920	73.920	73.920	1.834	1.834	1.834	7129.760	6,390.486
01/09/2020	30/09/2020	9273.000	9273.000	9273.000	71.280	71.280	71.280	0.461	0.461	0.461	4847.040	4,354.219
01/10/2020	31/10/2020	9403.680	9403.680	9403.680	112.200	112.200	112.200	0.461	0.461	0.461	4875.200	4,415.819
01/11/2020	30/11/2020	17472.840	17472.840	17472.840	42.240	42.240	42.240	0.461	0.461	0.461	9056.960	8,373.179
01/12/2020	31/12/2020	18115.680	18115.680	18115.680	46.200	46.200	46.200	0.461	0.461	0.461	9278.720	8,790.299
Subtotal 2020				198,071.280			706.288			6.736	105,564.800	91,793.456
01/01/2021	31/01/2021	24944.040	24944.040	24944.040	44.880	44.880	44.880	0.461	0.461	0.461	13113.760	11,784.939

01/02/2021	28/02/2021	18798.120	18798.120	18798.120	25.080	25.080	25.080	0.461	0.461	0.461	9697.600	9,074.979
01/03/2021	31/03/2021	19070.040	19070.040	19070.040	43.560	43.560	43.560	0.461	0.461	0.461	10167.520	8,858.499
01/04/2021	30/04/2021	20931.240	20931.240	20931.240	22.440	22.440	22.440	0.461	0.461	0.461	11142.560	9,765.779
01/05/2021	31/05/2021	27313.440	27313.440	27313.440	21.120	21.120	21.120	0.461	0.461	0.461	13831.840	13,460.019
01/06/2021	30/06/2021	19107.000	19107.000	19107.000	31.680	31.680	31.680	0.461	0.461	0.461	10343.520	8,731.339
01/07/2021	31/07/2021	19459.440	19459.440	19459.440	22.440	22.440	22.440	0.461	0.461	0.461	10243.200	9,193.339
01/08/2021	31/08/2021	9984.480	9984.480	9984.480	95.040	95.040	95.040	0.461	0.461	0.461	5220.160	4,668.819
01/09/2021	30/09/2021	16733.640	16733.640	16733.640	44.880	44.880	44.880	2.722	2.722	2.722	8523.680	8,162.358
01/10/2021	31/10/2021	12858.120	12858.120	12858.120	79.200	79.200	79.200	0.461	0.461	0.461	6633.440	6,145.019
01/11/2021	07/11/2021*	5511.968	5511.968	5511.968	33.000	33.000	33.000	0.461	0.461	0.461	2207.040	3,271.467
Subtotal 2021				194,711.528			463.320			7.332	101,124.320	93,116.556
Total				824,529.728			2,486.880			29.485	428,794.080	393,219.283

*Note: All meters' readings for the periods: 21st -31st Dec of 2017 to 2019, 01st -20th Jan of 2018 to 2019 and 01st -07th Nov of 2021 are sourced from the daily reading records and the readings of $EG_{output,y}$, $EG_{import,y}$ and $EG_{im-spare,y}$ have been confirmed by the grid company.

5.2 Project Emissions

The Project is a renewable electricity generating activity. According to ACM0002, no emission from the project activity was identified, and $PE_y = 0$.

5.3 Leakage

According to the methodology ACM0002, the project leakage is not considered, and therefore, $L_y = 0$

5.4 Net GHG Emission Reductions and Removals

Year	Baseline emissions or removals (tCO ₂ e)	Project emissions or removals (tCO ₂ e)	Leakage emissions (tCO ₂ e)	Net GHG emission reductions or removals (tCO ₂ e)
2017 21/12/2017-31/12/2017	4,349	0	0	4,349
2018	98,463	0	0	98,463
2019	91,102	0	0	91,102
2020	85,450	0	0	85,450
2021 01/01/2021-07/11/2021	86,682	0	0	86,682
Total	366,046	0	0	366,046

APPENDIX 1: <EVIDENCE OF ACHIVED SD CONTRIBUTIONS >

SDG Target 7.2, SDG Indicator 7.2.1 Renewable energy share in the total final energy consumption

Period	Amount of renewable energy (MWh)	Data source
08/11/2011-27/09/2012	88,417.560	https://registry.verra.org/app/projectDetail/VCS/969
21/12/2017-07/11/2021 (This monitoring period)	393,219.283	Section 5 of this report
Current Project Contributions	393,219.283	Only the amount of renewable energy supplied to the Grid by the project during this monitoring period is used to calculate the current project contributions.
Contributions Over Project Lifetime	481,636.843	Contributions over project lifetime to SDGs 7 include the amount of renewable energy supplied to the Grid by the project in all previously approved VCS monitoring reports and the amount during this monitoring period.

SDG Target 8.5, SDG Indicator 8.5.2 Unemployment rate, by sex, age and persons with disabilities



华润电力风能（青岛）有限公司-平度隆鑫风电场员工名单
(2021 年)

序号	姓名	职位	性别
1	邱振振	场站长	男
2	李佳卓	检修巡操岗	男
3	张书峰	检修巡操岗	男
4	尚子童	检修巡操岗	男
5	邓健	检修巡操岗	男
6	张龙龙	检修巡操岗	男
7	石永昌	检修巡操岗	男
8	闫西武	检修巡操岗	男
9	李珍景	检修巡操岗	男
10	王路平	检修巡操岗	男
11	李紫豪	检修巡操岗	男
12	刘衍	安全管理岗	男
13	逢健健	检修巡操岗	男
14	孙志营	检修巡操岗	男
15	徐壮壮	检修巡操岗	男
16	赵一泽	检修巡操岗	男
17	罗鹏	安全管理岗	男
18	张腾辉	行政后勤岗	男
19	蔡至诚	检修巡操岗	男
20	王文涛	检修巡操岗	男
21	戴薇薇	会计（兼职）	女
22	苏毅	行政岗（兼职）	女
23	丁文雁	档案管理岗	女
24	谢珍珍	行政后勤岗	女
25	白珊珊	人力资源岗（兼职）	女
26	韩芳	商务岗（兼职）	女

SDG Target 13, SDG Indicator Tonnes of greenhouse gas emissions avoided or removed

Period	Amount of emission reductions (tCO₂e)	Data source
08/11/2011-27/09/2012	82,302	https://registry.verra.org/app/projectDetail/VCS/969
21/12/2017-07/11/2021 (This monitoring period)	366,046	Section 5 of this report.
Current Project Contributions	366,046	Only the amount of emission reductions during this monitoring period is used to calculate the current project contributions.
Contributions Over Project Lifetime	448,348	Contributions over project lifetime to SDGs 13 include the amount of emission reductions avoided release into the atmosphere by the project in all previously approved VCS monitoring reports and the amount during this monitoring period.